



Step 1. Clean excess gravel from roof.



Step 2. Stir then pour GRR Flood Liquid onto gravel. (Note Blue color.)



Step 3. Ensure good coverage of GRR Flood Liquid.



Step 4. Spread GRR Flood Liquid with trowel or squeegee over entire roof surface.



Step 5. GRR Flood Liquid will begin to change colors as it dries.



Step 6. GRR Flood Liquid will be black when it has completely dried.



Step 7. Roll base coat of Sealoflex CT Pink onto dried GRR Flood Liquid.




Step 8. Roll Sealoflex Fabric into wet Sealoflex CT Pink, embedding it into the Fabric.



Step 9. Roll saturation layer of Sealoflex CT Pink into Sealoflex Fabric.



Step 10. Roll second row of fabric over first row, overlapping by 3" (75mm). Then roll saturation layer of Sealoflex CT Pink into fabric as in Step 9.

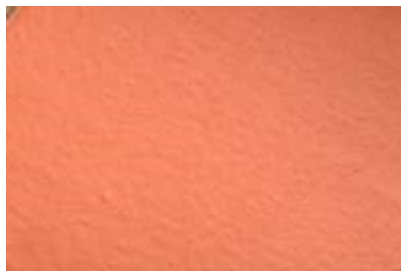

Step 11. Dried Sealoflex CT Pink.



Step 12. Roll Sealoflex CT Top over CT Pink. Two coats required. See next page for photo of completed project.



COMPLETED GRAVEL ROOF RECOVERY SYSTEM