


Plaza Deck with Insulation and Masonry Topping

NOTE:

1. Expansion Joint in Masonry Topping optional at discretion of designer.
2. Tile or Marble may be replaced with decorative coating.

3/8" x 3/8" Single Part Polyurethane Caulk Joint @ max. 10' centers in both directions (see Notes 1. and 2.)

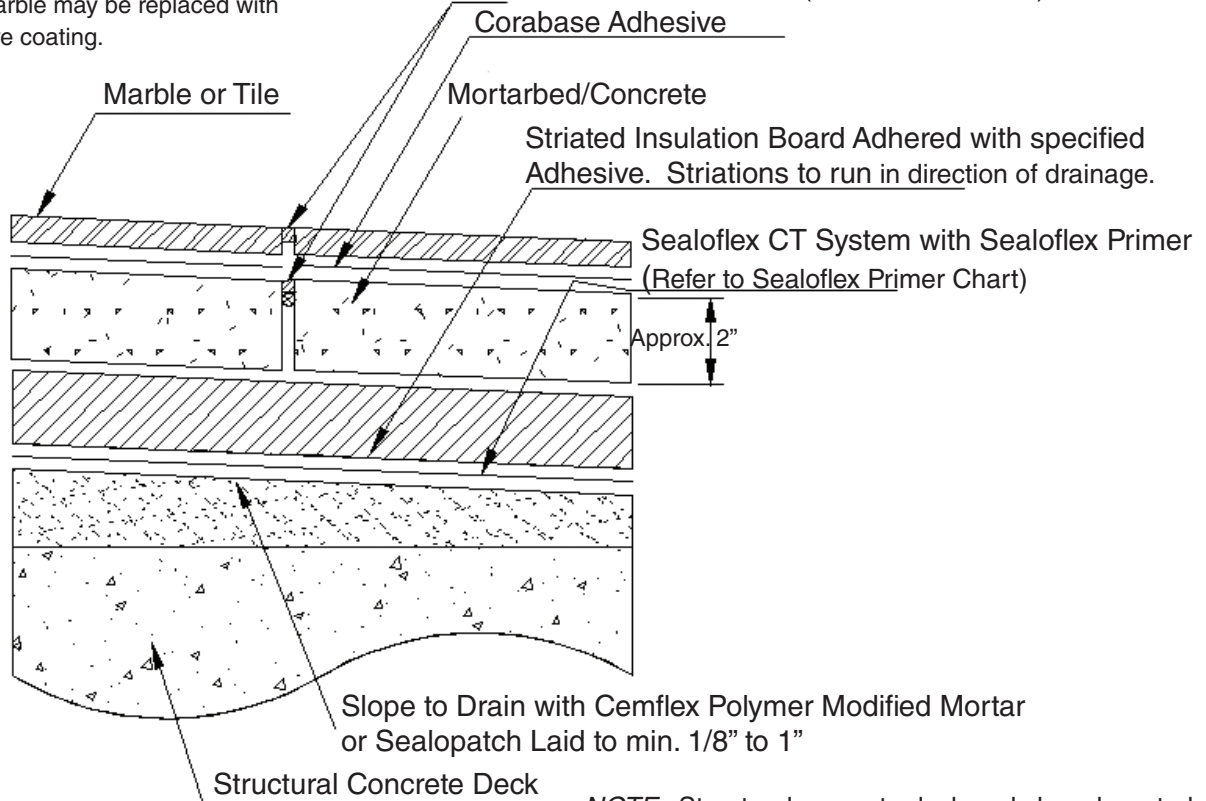

NOTE: Structural concrete deck and sloped mortarbed can be replaced with sloped structural plywood.

General Notes

- Approved for all Sealoflex warranties.
- Follow steps for any necessary priming as outlined in specifications manual.
- Follow steps for application as outlined in specifications manual.
- All Sealoflex fabric to overlap a minimum of 3" when 2 pieces come together.
- All Sealoflex fabric to overlap a minimum of 3" when there is a change in plane.
- Use two separate pieces of Sealoflex fabric at edges and penetrations.