


Product Chart

STANDARD COLORS:

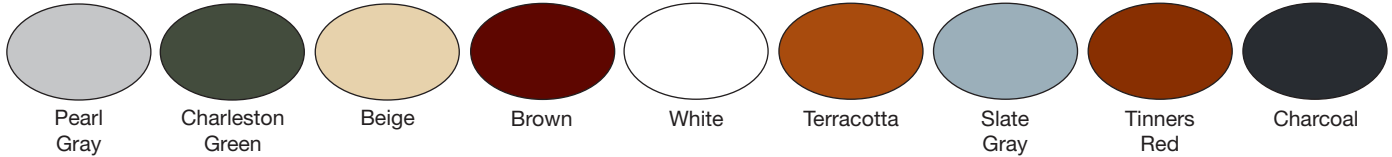

* Colors shown here are approximate due to printing limitations. In addition, colors will vary according to product and texture.

PRODUCT	COVERAGE RATE
ADDITIVE 100™	Used as an additive to certain Sealoflex Products. Contact the Technical Department.
BUTTERGRADE™	1 gallon will prepare approximately 100-150 sq.ft.
CEMFLEX™	60 sq. ft./gallon (after mixing with water and cement and using Sealoflex Fabric)
CERAMIFLEX™	50 sq.ft./gallon (includes 2 coats)
CORABASE™	50# bag (Coverage rate varies depending on thickness of product application. See product data sheet for details)
CORAFLEX FINE™ *	80-100 sq. ft./5-gallon pail (approximately)
CORAFLEX MEDIUM™ *	80-100 sq. ft./5-gallon pail (approximately)
CORAFLEX COARSE™ *	80-100 sq. ft./5-gallon pail (approximately)
CT FIBRESEAL PINK™	25 sq.ft./gallon (both coats)
CT FIBRESEAL TOP™	25 sq.ft./gallon (both coats) (White only)
CT POND GRADE™	70 sq.ft./gallon (includes 2 coats) (available in black only)
CT PINK™	30 sq.ft./gallon (base and saturation coats)
CT TOP™	<i>Unreinforced over Metal:</i> 50 sq.ft./gal (2 coats) <i>Full System Reinforced :</i> 70 sq.ft./gal (2 coats) (White only)
DAMPSEAL 101™	225-325 sq. ft./gallon (per coat)
EPDM PRIMER™	250 sq. ft./gallon (depending upon porosity of substrate)
EXTREME™ *	70 sq.ft./gallon (includes 2 coats)
CORAFLEX FABRIC™	48" x 118.6'/roll
JOINTING FABRIC™	4" x 300'/roll, 6" x 100'/roll, 6" x 300'/roll
DECK FABRIC™	5' x 100'/roll, 10' x 100'/roll
FLASHING FABRIC™	4" x 300', 6" x 100', 6" x 300', 12" x 300', 20" x 300', 40" x 100', 40" x 324' (roll)
FLEXOBASE™	1/16" depth / 80 sq.ft./50 lbs. bag (approximately)
FINISH COAT™ *	<i>"Stand Alone" Coating:</i> 50 sq.ft./gal (2 coats) / <i>"Finish Coat" , Sealoflex System:</i> 70 sq.ft./gal (2 coats) <i>Over Metal Surfaces:</i> 50 sq.ft./gal (2 coats)
FLASHING GRADE™	2 gallons will approximately yield an area of 50 sq. ft. of flashing (100 LF at 6" wide)

SEALOFLEX INC.

CORPORATE OFFICES
 2520 Oscar Johnson Drive
 Charleston, SC 29405
 Tel: (843) 554-6466
 (800) 770-6466
 Fax: (843) 554-6458
 Website: www.Sealoflex.com
 E-mail: info@sealoflex.com

SALES OFFICE
 CHARLESTON, SC
 HAMBURG, GERMANY
 CANTERBURY, KENT, U.K.

**Waterproofing Systems****LIMITED WARRANTY**

Sealoflex warrants its products to be free of manufacturing defects and that they will meet Sealoflex's current published physical properties when applied in accordance with Sealoflex's directions. There are no other warranties by Sealoflex of any nature whatsoever, expressed or implied, including any warranty of merchantability of fitness for a particular purpose in connection with this product. Sealoflex Inc. shall not be liable for damages of any sort, including remote or consequential damages, resulting from any claimed breach of any warranty whether expressed or implied, including any warranty of merchantability of fitness for a particular purpose or from any other cause whatsoever.

JULY 2010

COVERAGE CHART (cont.)

PRODUCT	COVERAGE RATE
GRR FLOOD COAT™	12-18 gallons/100 sq. ft. depending on size and amount of retained gravel
METAL ETCH PRIMER™	250 sq. ft./gallon
METALFLEX COPPER FINISH™	70 sq.ft./gallon (includes 2 coats) : 50 sq. ft./gallon (includes 2 coats)
QUICKCLEAN™	Used as a cleaning solvent. 1 gallon, 5 gallon
REFLECTOWHITE™	70 sq.ft./gallon (includes 2 coats) : 50 sq. ft./gallon (includes 2 coats) Only available in White. Use as coating only.
RUST X - 2020™	600 sq. ft./gallon
SEALCLEAR™	80-100 sq. ft./gallon (includes 2 coats)
SEALCOAT ELASTIC™ *	90 sq. ft./gallon for 10 mils dry film thickness (includes 2 coats) 60 sq. ft./gallon for 15 mils dry film thickness (includes 3 coats)
SEALOBOND PRIMER™	250 sq. ft./gallon
SEALOCAPS™	300 pieces/roll
SEALODECK™	100 sq. ft./gallon (includes 2 coats) colors: clear, golden pine, nut brown, red cedar, weathered gray
SEALODRAIN 200™	1/4" x 4' x 50' used with Sealodrain system (Compressive Tolerance: 10,800 lbs./sq.ft.)
SEALODRAIN 500™	7/16" x 4' x 50' used with Sealodrain system (Compressive Tolerance: 15,000 lbs./sq.ft.)
SEALODRAIN 650™	7/16" x 4' x 50' used with Sealodrain system (Compressive Tolerance: 21,000 lbs./sq.ft.)
SEALOGREEN 50™	7/16" x 4' x 50' used with Sealodrain system (Extensive Green Roof - Vegetative ground cover and grasses)
SEALOGREEN 100™	1" x 3' x 100' used with Sealodrain system (Intensive Green Roof - Large Plants, Shrubs and Trees)
SEALODRAIN TOTAL DRAIN™	7/16" x 2' x 50' used with Sealodrain system
SEALODRAIN 6" PARALLEL OUTLET™	6" outlet used with Sealodrain system
SEALODRAIN 12" CORNER™	12" corner used with Sealodrain system
SEALODRAIN 6" PERPENDICULAR OUTLET™	6" perpendicular outlet used with Sealodrain system
SEALOFLEX PINK®	40 sq.ft./gallon : 100 sq.ft./gallon
SEALOMENT PLUS™	250 sq. ft./50 lb. bag (approximately)
SEALOPATCH™	24 sq. ft./50 lb. bag (approximately)
SEAMTAPE™	4" x 50' (12 per case) 6" x 50' (8 per case)
WEARCOAT™ *	180 sq. ft./gallon per coat (90 sq. ft./gallon includes 2 coats) Also available with sand (non-skid)

PLEASE REFER TO EACH INDIVIDUAL PRODUCT DATA SHEET FOR ADDITIONAL IMPORTANT PRODUCT AND APPLICATION INFORMATION.