

Buttergrade



Heavy Bodied, Flexible, Water-Resistant Filling and Joint Compound

Commercial Product Data Sheet

Description:

Buttergrade is a trowellable, Water-Based paste with good adhesion characteristics. It dries to form a flexible and water-resistant filler which may be sandpapered to produce a smooth surface for fine work.

Uses:

Buttergrade is used:

- to smooth and fill knot holes and seams between plywood boards on decks
- to feather off ridges left by the application of Sealoflex fabric
- as a flexible spackling paste for interior and exterior use
- water-resistant joint compound for sheetrock

Advantages:

- Easily applied with putty knife or trowel
- Flexible when cured
- Fast drying
- Can be smoothed with sandpaper
- Water-Based for easy clean up
- Excellent adhesion to wood, metal, stucco, painted surfaces, concrete, brick and other surfaces.

Color

White

Instructions for Use

Surface Preparation

Remove all oil and grease, grit and loose particles from the substrate. Prime where necessary. Refer to Sealoflex Priming Chart.

Application

Apply Buttergrade with a trowel or putty knife to smooth out voids or imperfections. If depth of void is greater than 1/8" apply in two or more layers allowing previous layer to dry before covering with a fresh application. If required, cured Buttergrade may be sanded to achieve a smooth finish. Overcoat with a Sealoflex product after the Buttergrade is dry. If using a solvent based Sealoflex coating over Buttergrade,

it is recommended to allow at least 24 hours cure time in dry conditions. Longer cure times will be needed in humid conditions.

DO NOT USE ENVIROFLEX ON BUTTERGRADE.

Coverage

1 gal. is sufficient to prepare approximately 100-150 sq.ft.


Curing

Drying time will be 1/2-2 hours depending on weather conditions.

Cleaning

Clean all equipment and tools immediately with water. Dried Buttergrade can be removed with mineral spirits.

NOTE: Sand when dry, but within 24 hours of application

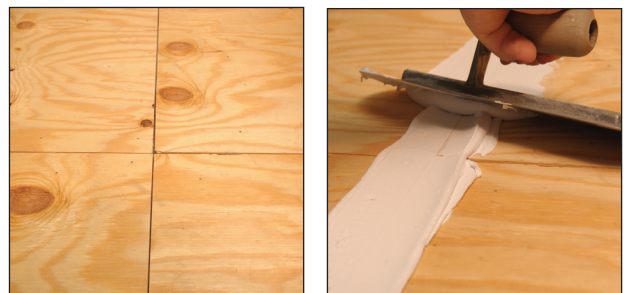

Buttergrade

Physical and Mechanical Properties

Property (as Manufactured)	Values
Type	Paste
Shelf Life and Storage Conditions	12 months if unopened & stored between +40°F & 90°F <i>Do Not Allow To Freeze</i>
Application Temperature	+45°F to 105°F (Ambient) and +40°F to 130°F (Surface)
Packaging	5 gal containers

Ed. July 2016